
ZHUOTAI SANITARY WARE CO.,LTD.

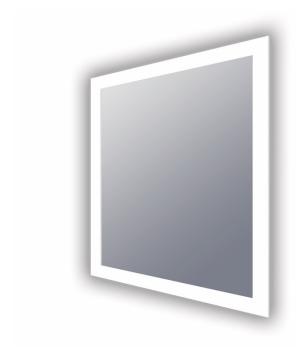

PRODUCT DESCRIPTION

An illusion of free-floating reflection merges seamlessly with resplendent light to create the perfect Rijeka. With practical task lighting and soft wall glow, this beautiful lighted mirror will illuminate your bathroom in brilliant splendor.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting as well as wall-glow ambient lighting around the mirror. Mirror shall have corrosion-resistant glass and have uniform light output in frosted areas, using replaceable LEDs with greater than or equal to 90 CRI (color rendering index). Product will be made in China with best qualityl components and have a 5-year limited warranty.

THE ZHUOTAI MIRROR ADVANTAGE

- √ 22 years of mirror knowledge and expertise
- √ 10,000pcs installations every month
- ✓ Premium quality you can buy with full confidence
- √ Lowest total cost of ownership
- √ Quick ad professional customer service support
- √ 25,000-square-meter China manufacturing facility

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant glass
- Forward-facing task lighting
- Wall-glow ambient lighting on all four sides with diffuser for a finished side view
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Fast lead times
- Easy installation
- RoHS, IP57, UKCA, ErP compliance
- 5-year limited warranty
- Made in China with best quality components

AVAILABLE OPTIONS

- Defogger
- CCT: 3,000K,4500K,6,000K
- 10%-100% brightness dimming
- Forward-phase dimming
- 12VDC available 3
- Custom sizes

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000K,4,500K,6,000K
- 60 initial lumens/inch
- Maximum 100 lumens/watt efficacy
- Calculated 52,000-hour LED lifespan

SAFETY SPECIFICATIONS

- Entire assembly meets CE,RoHS, IP57, UKCA,ErP
- International certifications
- Safety-backed mirror

ZHUOTAI SANITARY WARE CO.,LTD.

INSTALLATION SPECIFICATIONS

- Connect the hardwire from junction box on mirror's back to wall supply at 220-2240VAC
- Controlled by touch switch on mirror
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

MODELS

Base Model*	Dimensions	Power Requirements
RIJEKA-24.00x36.00	24"W x 36"H x 1.75"D (610mm x 914mm x 44mm)	OUTPUT 12VDC, 74W
RIJEKA-30.00x42.00	30"W x 42"H x 1.75"D (762mm x 1067mm x 44mm)	OUTPUT 12VDC, 91W
RIJEKA-36.00x36.00	36"W x 36"H x 1.75"D (914mm x 914mm x 44mm)	OUTPUT 12VDCC, 93W
RIJEKA-42.00×42.00	42"W x 42"H x 1.75"D (1067mm x 1067mm x 44mm)	OUTPUT 12VDC, 116W
RIJEKA-48.00x36.00	48"W x 36"H x 1.75"D (1219mm x 914mm x 44mm)	OUTPUT 12VDC, 115W
RIJEKA-54.00x42.00	54"W x 42"H x 1.75"D (1372mm x 1067mm x 44mm)	OUTPUT 12VDC, 137W
RIJEKA-60.00x36.00	60"W x 36"H x 1.75"D (1524mm x 914mm x 44mm)	OUTPUT 12VDC, 132W
RIJEKA-66.00x42.00	66"W x 42"H x 2"D (1676mm x 1067mm x 51mm)	OUTPUT 12VDC, 157W

^{*}Base model number shown only. To specify additional options, contact $\underline{sales@zhuotaichcina.com}.$

DIMENSIONAL DRAWING (Not to scale. Frost and border widths may vary depending on mirror size



